

# ATLANTICLED

## Manual Instruction

### LED Controllers

WiFi Smart LED Controller is our newly developed LED controller series, including DIM, Dual White, RGB, RGBW, RGBCCT 5 kinds. It works on Tuya Smart LifeAPP for smartphone control and 4G long distance control and works with 2.4GHzRF remote controller. It also support third-party voice control via Alexa or Google Home.

### 1. Features


 WiFi wireless control	 Dim brightness / Saturation
 Smartphone APP control	 Bluetooth wireless control
 Support third party voice control	 2.4G RF wireless transmission technology
 Support remote control (control distance 30m)	 Tap-to-Run & automation
 Group control	 Auto-transmitting & Synchronization
 Device sharing	 Link/Unlink/Reset
 Support music rhythm	
 Timing setting / countdown	Button on the controller
turn on / off LED lights	

### 2. Parameters

#### Tuya Wifi RF LED Dimmer

Model: CX-W01-P1-12A  
Work Voltage: 12-24V DC  
Output Channel: 1  
Output: 6A/Port, Total 12A Max  
Max. Power: 144W(12V), 288W(24V)  
Size: L75\*W36\*H16.5mm  
Match Remote: LM007, LM087, RC01RFB  
App Compatibility: Yes

#### Connection Diagram: Input Voltage=Output Voltage

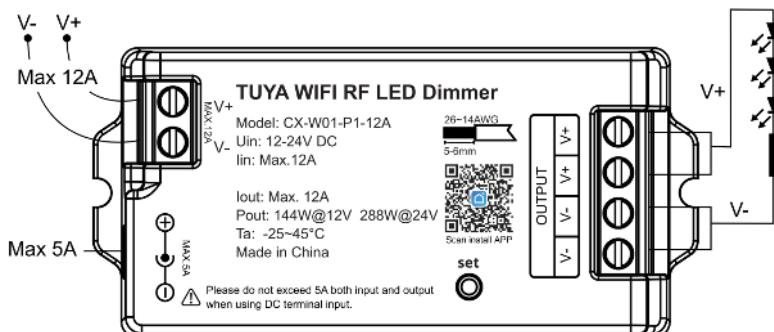


## Compatible Remote Controller:

Compatible with these remote controls (Purchased separately). For more details, please read the remote instruction.



(4). Added devices will be displayed on homepage after linking successfully, then click the device and go into the control interface for more operation.

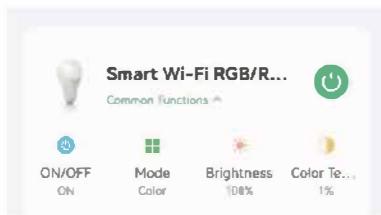


**Note:** Please complete the linking within 3 minutes, after 3 minutes, the devices will not be linked, you have to do above "2" step, and link again.

## Signal transmitting

One strip controller can transmit the signals from the remote control to another controller within 30m, as long as there is a strip controller within 30m, the remote control distance can be limitless.

## Mode synchronization

Different controllers can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed.

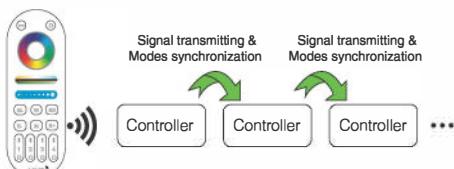

## Smartphone APP WiFi Control Instruction

### 1. Download and install [Smart Life] or [Tuya Smart] APP

Search for [Smart Life] in Apple or Google store or scan following QR code to download and install the app.

Please click " Register " button to create account while using it in the first time, Log in directly if you already had account.



### 2. Link to Smartphone&Reset Devices

- (1). Make sure Smartphone is working on WLAN network.
- (2). Long press "SET" button, or switch ON-OFF power 4 times (ON-OFF-ON-OFF-ON-OFF-ON), when the white light blink, the device come into link or reset mode.
- (3). Open the sign-in APP, it will discover the devices automatically, (If it's not discovered, please click "+" on the top right corner, and select "add new device" manually) follow the steps and complete linking;

## Bluetooth Control:

While the WiFi router disconnected, you can open the bluetooth on your smartphone and control the linked device directly at a shorter distance (within 20M).

### Switch Bluetooth Control Steps:

- (1). Complete the network configuration of the devices on your smartphone first.
- (2). Disconnect the WiFi router connected to the device, close WiFi signal and 4G signal on your smartphone, then open the bluetooth, wait for some minutes to control.

## Attention

1. Please check whether the input voltage of the constant voltage power supply is in accordance with the controller, and please check the connection of both the cathode and anode.
2. The working Voltage is DC12~24V, the controller will be broken if the voltage is higher than 24V.
3. Non-professional user cannot dismantle the controller directly, otherwise, it may cause fire and electric shock.
4. The working temperature(Ta) is -25~45 °C; Do not use the device to direct sunlight, moist and other high temperature area.
5. Please do not use controller around the mental area and high magnetic field, otherwise, it will badly affect the control distance.
6. When the device load to 12A, wire diameter must be over 1.5mm<sup>2</sup>.
7. When the device load over 10A, the connecting cable must be shorter than 40cm long from DC port to LED strip.
8. Please install the device on good dissipation area.



[www.atlanticled.ca](http://www.atlanticled.ca)

